



TOUGH, WEATHER-RESISTANT CONSTRUCTION

QUICK-ADJUST HARDWARE FITS A WIDE RANGE OF BIKE SIZES

SPRING LOADED STORAGE ARM FOR MAXIMUM CAPACITY

REAR REFLECTOR MOUNTING POINT

For warranty details go to www.thebellgarage.com

SEE INSTALLATION INSTRUCTIONS INSIDE -



WARNING: FAILURE TO OBSERVE THESE GUIDELINES MAY RESULT IN SERIOUS INJURY OR DAMAGE. NOT FOR PASSENGER USE. 20 Ibs (9 kg) WEIGHT LIMIT. ENSURE THAT THE RACK IS FIRMLY ATTACHED BEFORE EACH USE. MAKE SURE TO USE A CPSC APPROVED REFLECTOR.


INCLUDES: ONE RACK AND MOUNTING HARDWARE



WWW.THEBELLGARAGE.COM

© 2012 Bell Sports, Inc. / 1-800-456-BELL 1924 County Road 3000 North / Rantoul, IL 61866 USA Made in China

 (\mathbf{x})

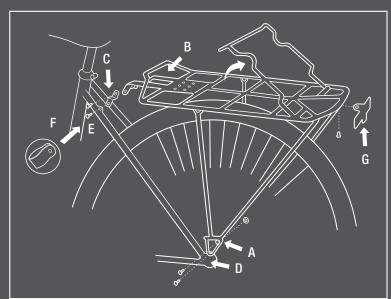

INSTALLATION INSTRUCTIONS: 1) BOLT REAR STRUTS TO TOP HOLE IN PLATE (A).

2) BOLT MOUNTING BARS (B) TO RACK PLATFORM.

3) BOLT PIVOTS (C) TO MOUNTING BARS. 4) SCREW BOTTOM PLATE TO TOP OF DROP-OUT (D).

5) SCREW BOLT PIVOTS TO BRAZONS (E). NOTE: IF YOUR BIKE IS NOT EQUIPPED WITH REAR BRAZONS, USE C-CLAMPS

ENCLOSED (F). 6) INSTALL REFLECTOR PLATE (G) USING SHORT SCREW

7) ADJUST AND TIGHTEN ALL BOLTS AND SCREWS SECURELY. NOTE: PERIODICALLY CHECK ALL NUTS AND BOLTS FOR TIGHTNESS.